

Groundwater Quality Assessment in Urban Area of Baghdad, Iraq, Using Multivariate Statistical Techniques

Alhassan H. Ismail

Institute of Technology, Foundation of Technical Education / Baghdad.

Email: hassan19851988@yahoo.com

Muntasir A.H.

Institute of Technology, Foundation of Technical Education / Baghdad.

Email: muntasirshareef@yahoo.com

Reem J. Channo

Al-Khwarizmi College, University of Baghdad/Baghdad.

Email: reem_jchanno@yahoo.com

Received on: 8/5/2014 & Accepted on: 29/1/2015

ABSTRACT

An attempt has been made to assess the overall groundwater quality and identify major variables affecting the groundwater quality in the urban area of Baghdad, Iraq. Groundwater samples from tube wells of 66 sampling sites were analyzed for the major physicochemical variables during May 2010. From the Hill–Piper trilinear diagram, it is observed that the majority of ground water from sampling sites are Ca^{2+} - Mg^{2+} - Cl^{-} - SO_4^{2-} type and Na^{2+} - K^{+} - Cl^{-} - SO_4^{2-} type water. Multivariate statistical techniques such as factor analysis and cluster analysis were applied to identify the major factors (variables) corresponding to the different source of variation in groundwater quality of Baghdad. Factor analysis identified three major factors explaining 82.506% of the total variance in water quality; and the major variations are related to degree of mineralization of the geological components of soils, irrigation return flow, agricultural activities and mixing of wastewater. Hierarchical cluster analysis revealed three different groups of similarities between the sampling sites, reflecting different physicochemical properties and pollution levels in the groundwater quality.

Keywords: Groundwater quality, Baghdad, Multivariate statistical techniques, urban area, Factor analysis, Cluster analysis.

تقييم نوعية المياه الجوفية في المناطق الحضرية لمدينة بغداد، العراق باستخدام التحليل المتعدد المتغيرات

الخلاصة

في هذه الدراسة، تم تقييم نوعية المياه الجوفية وتحديد المتغيرات الرئيسية التي تؤثر على نوعية المياه الجوفية في المناطق الحضرية لبغداد، العراق. علماً ان عينات المياه الجوفية التي جمعت من الآبار من 66 موقع

قد خلّلت للمتغيرات الفيزيائية-الكيميائية الرئيسية خلال شهر أيار لسنة 2010. إستنادا الى مخطط Hill-Piper trilinear، لوحظ أن غالبية عينات المياه الجوفية من مواقع أخذ العينات هي من نوع Ca^{2+} - Mg^{2+} - Cl^- و SO_4^{2-} ونوع Na^{2+} - K^+ - Cl^- - SO_4^{2-} . كما تم تطبيق التحليل المتعدد المتغيرات مثل التحليل العاملي والعنقودي لتحديد العوامل الرئيسية (المتغيرات) التي تقابل مختلف مصادر تلوث المياه الجوفية في بغداد. وقد حدد التحليل العاملي Factor Analysis ثلاثة عوامل رئيسية موضحة 82.506% من التباين الكلي في نوعية المياه؛ وارتبطت هذه الاختلافات بشكل رئيسي لدرجة التمعن من المكونات الجيولوجية للتربة، ومياه الري الراجعة والأنشطة الزراعية واختلاط مياه الصرف الصحي. وكشف التحليل العنقودي الهرمي ثلاث مجموعات مختلفة من أوجه التشابه بين مواقع أخذ العينات، والتي تعكس مختلف الخصائص الفيزيائية-الكيميائية ومستويات التلوث في نوعية المياه الجوفية.

INTRODUCTION

Groundwater contributes about 120 million liters per day (nearly half of the total water supply) during wet season, which reaches up to 60–70% during the dry season [1]. Thus, it is an important source of potable water, in which, it is expected to be of high-quality, small seasonal variations, storage, easy exploitation, and socioeconomic development [2,3]. In general, groundwater is widely used for irrigation, industrial activities, drinking, and domestic purposes. Rapid growth of population, urbanization, industrialization, and agriculture activities increase its exploitation, reduce availability, and enhance vulnerability to contaminate the quality of water. Groundwater could be contaminated by disposal of urban and industrial wastes [4] and agricultural chemicals [5]. In urban areas, the disposal of wastewater including human excreta in a septic tank is a common practice. Also, the discharge of untreated effluent into the streams could affect the groundwater quality adversely by rising salinity and coloring matter content in wells located along the bank of these streams [6]. Many studies related to groundwater quality have been conducted in different basins [7-16].

Baghdad, the capital of Iraq, is considered to be the most populated and industrialized city in Iraq in which the urbanized, agricultural and industrial areas represent 72.69%, 25% and 2.31% of the total area respectively [17]. Despite, Tigris river at Baghdad is the main source for drinking water supply and irrigation, the river water quality has been deteriorated during the last three decades due to increase of water consumption and various urban pollutant sources [18,19]. The water quality in both surface and ground water resources was negatively affected [20]. Therefore, study the quality of other sources of water in the urban area such as groundwater is of prime importance. In other hand, several studies conducted in the area dealing mainly with Tigris river [21-24]. Groundwater is threatened with pollution from different sources such as domestic wastes, agricultural wastes, runoff from urban areas, soluble effluent and earthen septic tanks. And the groundwater chemistry, in turn, depends on a number of factors (i.e. general geology, degree of chemical weathering of various rock types and quality of recharge). In order to ensure groundwater quality, evaluation and monitoring of its quality is necessary in urban areas whilst testing of a variety of water quality characteristics and regular periodic assessment of water is a time-consuming process, toilsome and expensive. Besides, the measurement of all the groundwater quality parameters at a regular interval is not desired because this will not provide additional information on the water quality aspect.

The use of multivariate statistical techniques could simplify the process in a convenient size. The relationship between the huge numbers of variables in surface and groundwater studies is better explained using the multivariate statistical techniques such as factor and cluster analyses [25-27]. The application of these

techniques helps in the organization and interpretation of complex data sets to better understand the water quality and ecological status of the studied systems, removes noise from the data sets, avoid misinterpretation of environmental monitoring data, identifies groupings in the set of data, allows the identification of possible factors/sources that influence water systems, and offers a valuable tool for reliable management of water resources as well as rapid solution to pollution problems [28-33]. In this context, this study aimed to assess the current state of water quality and identify the major factors affecting on water quality of groundwater in the urban area of Baghdad. Additionally, clustering method selects the homogeneous groups within a particular data set (i.e. the similarities or dissimilarities between the monitoring wells). This may provide a proper basis for management of groundwater schemes in the region.

Materials and Methods:


Study area

The total area of Baghdad governorate is 5159 km² and the population of the city is about 7 million which about 24% of Iraqi population [17]. The urban area (study region) lies between 33°10'-33°29' N latitudes and 44°09'- 44°33' E longitudes covering an area of about 1350 km² and it has an average elevation of 40 m. The area is characterized by arid to semi-arid climate with dry hot summers and short cold winters and the mean annual rainfall is about 151.8 mm [34]. The average temperature in this region varies between 16.42 °C and 35.39 °C in summer and between 9.46 °C and 12.49 °C during winter, respectively for the period 1990 – 2010 [35]. Tigris river passes through the city and divides Baghdad into two sections, Karkh to the west and Rasafa to the east and the length of the river in Baghdad stretch is about 50 km (Fig.1). The geology of the study area represents, as a whole, a flood plain which consists of quaternary deposits (see Fig. 2). Baghdad province lies within the unstable shelf of the Arabian Plate, mostly within Tigris subzone of the mesopotamian zone [36]. Most of the present structures are subsurface and they have no surface expressions. Two of these structures are anticlinal structures; the first is the East Baghdad structure and the second is the west Baghdad structure [37].


Sampling and analyses

A total of 66 samples were collected randomly from different wells of the urban area of Baghdad. Out of 66 collected samples 43 were from karkh section and 23 from Rasafa (Fig. 1). Groundwater samples were collected from different tube wells (almost 25 m in depth) during May 2010. The tube wells were continuously pumped for 10 min prior to the sampling, to ensure that groundwater to be sampled was representative of groundwater aquifer. The groundwater parameters were analyzed in laboratory of the general commission for groundwater after completion of the sampling. The analyzed parameters were pH, electrical conductivity (EC), total dissolved salts (TDS), sodium (Na), potassium (K), calcium (Ca), magnesium (Mg), bicarbonate (HCO₃), chloride (Cl), sulphate (SO₄) and nitrate (NO₃) ions. pH and electrical conductivity values were measured immediately with corresponding portable electronic instruments. Total dissolved solids (TDS) were determined as the residue left after evaporation of the filtered sample. Calcium and magnesium were analyzed titrimetrically by complexometric titration method using (EDTA). Bicarbonate concentration was determined by acidimetric titration method using methyl orange as indicator. Chloride was determined by argentometric titration

method. Sulphate and nitrate were analyzed by UV-Visible spectrophotometry. The descriptive statistics of the obtained water quality data for the present study is shown in Table 1.

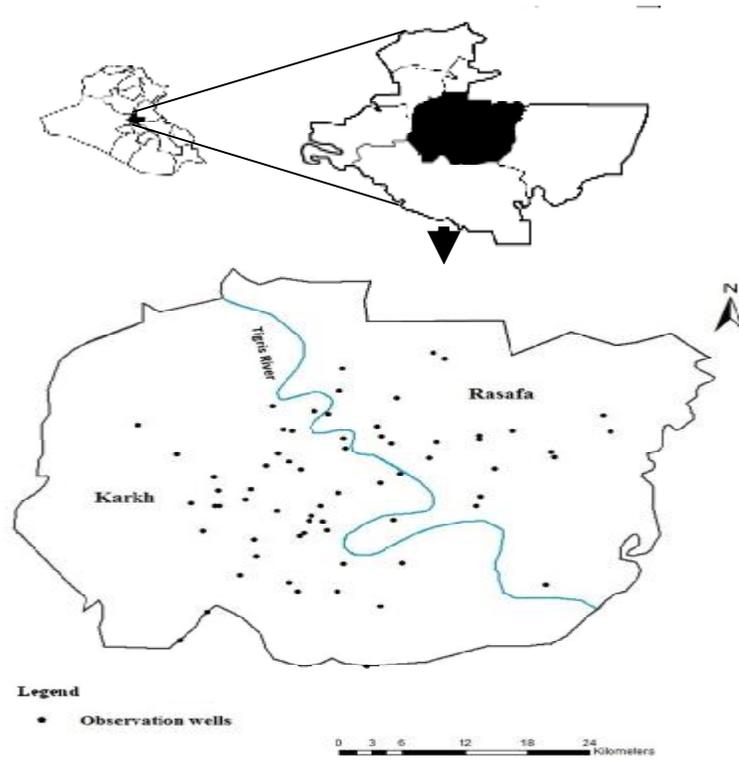

Figure(1). Map of study area showing locations of observation wells in the urban area of Baghdad

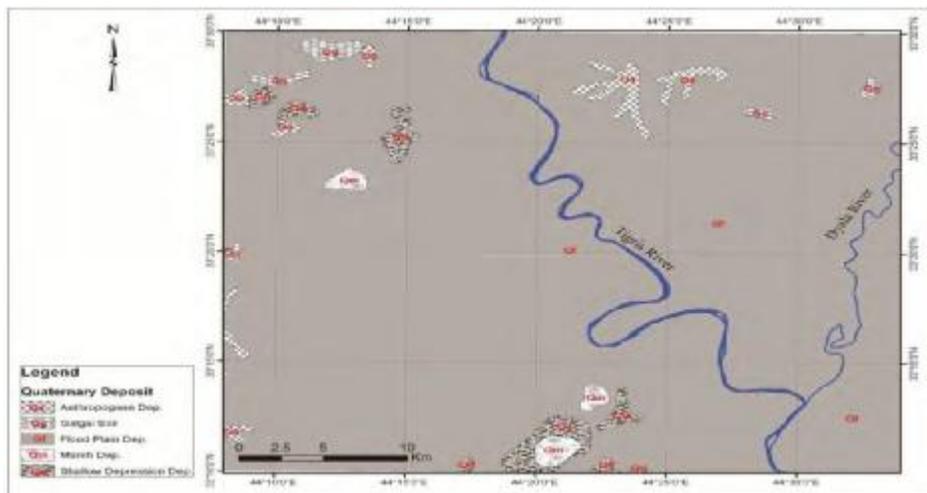

Figure(2). Geological map of the urban area of Baghdad

Table (1). Descriptive statistical summary of groundwater quality data in urban area of Baghdad City, n = 66

No.	Variables	Minimum	Maximum	Mean	SD
1	EC, $\mu\text{S}/\text{cm}$	1100	29600	7179.84	5746.9
2	pH	7.20	8.7	7.8	0.378
3	TDS, mg/L	864	19064	4735.28	3672.7
4	Ca, mg/L	72	1100	407.65	252.1
5	Mg, mg/L	67	1924	542.21	449.9
6	Na, mg/L	101	6405	1386.78	1254.3
7	K, mg/L	2	60	12.94	11.8
8	Cl, mg/L	107	8724	1477.51	1616.07
9	CO ₃ , mg/L	0	70	7.63	15.66
10	HCO ₃ , mg/L	33	491	163.62	105.74
11	SO ₄ , mg/L	40	3110	688.18	502.77
12	NO ₃ , mg/L	0.1	17.5	2.36	3.36

SD: standard deviation

Data treatment and multivariate analysis

Most multivariate statistical methods require variables to conform to the normal distribution, thus, before multivariate statistical analysis; the normality of the distribution of each variable was checked by the Shapiro–Wilk (W) test. The test demonstrated that all of water quality variables were not normally distributed. Then, the non-normal distribution variables were subjected to a transformation in which the original data were transformed in the form $x' = \log_{10}(x)$ [38,39]. After log-transformation, the data of each variable were normalized. All log-transformed variables were also z-scale standardized (the mean and variance were set to zero and one, respectively) in order to avoid misclassification due to the wide differences in data dimensionality [40]. The aim of standardization is to minimize the influence of difference on variance of variables and eliminates the influence of different units of measurement and renders the data dimensionless [41]. In order to account the non-normal distribution of the measured groundwater quality variables, the correlation structure between the variables was studied by using the Spearman *R* coefficient as a nonparametric measure of the correlation between the parameters [26,28,30,39].

Factor analysis (FA) was used to identify the main components of the groundwater quality and the most important variables causing difference in the groundwater quality of the urban area of Baghdad. FA includes three main stages: correlation matrix which is generated for all variables, initial set of factors are extracted using PCA method, and then the extracting factors are rotated using Varimax rotation [42]. In factor analysis, the basic concept is expressed in the following formula:

$$z_j = a_{j1} f_1 + a_{j2} f_2 + \dots + a_{jm} f_m + e_{ij}; j = 1, 2, \dots, p \quad \dots(1)$$

Where

z_j is the measured value, f is the factor score, a is the factor loading, e is the residual term accounting for errors or other sources of variation, i is the sample number, j is the variable number, and m is the total number of factors [43].

Cluster analysis (CA) was also used to classify objects with similar properties which divide a large number of objects into smaller number of homogenous groups based on the similar characteristics [44]. In this study, Hierarchical agglomerate

clustering using Ward’s method [28] is the most common approach, which provides similarity relationships between any one sample and the entire data set, and is typically illustrated by a dendrogram (tree diagram). Euclidean distance method was used for determining distance, which is one of the most commonly adopted measures. The geometric distance in the multidimensional space and is computed as [45]:


$$\text{Distance}(X, Y) = \left\{ \sum i(X_i - Y_i)^2 \right\}^{1/2} \dots (2)$$

All statistical data treatment, FA and CA were performed using Statistical Package for the Social Sciences Software - SPSS 17 for Windows.

Results and Discussion:

Classification of Groundwater

Hill (1940) [46] has developed a pattern diagram and later improved by Piper (1944, 1953) [47,48] to form of trilinear diagram, which is an effective tool in segregating analysis data with respect to sources of the dissolved constituents in groundwater. In order to understand the chemical characteristics of groundwater in the study region, groundwater samples were plotted in Hill–Piper trilinear with the help of GW_Chart software [49]. The diagram includes two triangular diagrams at left and right for plotting the cations and anions, respectively, with a diamond-shaped field consists of two equal triangular fields. Based on Piper diagram (Fig. 3), groundwater from tube wells can be classified into two types Ca^{2+} - Mg^{2+} - Cl^- - SO_4^{2-} type and Na^{2+} - K^+ - Cl^- - SO_4^{2-} . These water types suggest the mixing of high-salinity water caused from surface contamination sources such as irrigation return flow and mixing of sewage. Nearly, 51.5% of samples fall under Ca^{2+} - Mg^{2+} - Cl^- - SO_4^{2-} type and 48.5% under Na^{2+} - K^+ - Cl^- - SO_4^{2-} type.

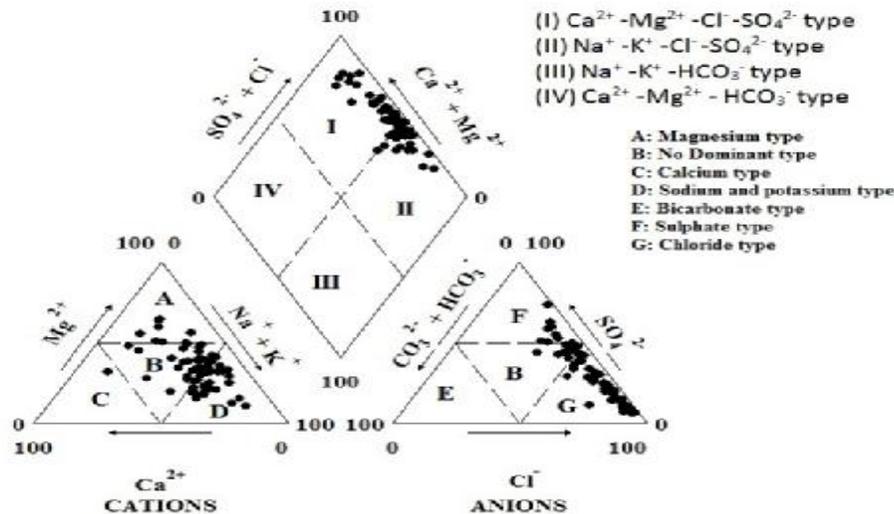

Figure(3). Hill–Piper trilinear diagram shows the chemical character of groundwater samples

Correlation analysis

Data in Table 2 provide the Spearman correlation matrix of the groundwater quality parameters. The pH has weak correlation with all variables. EC shows strong positive correlations with TDS, Mg²⁺, Ca²⁺, Na⁺, K⁺, Cl⁻, HCO³⁻, and SO^{4 2-}; and these variables are also positively correlated with each other. NO₃ shows poor correlation with all variables and may indicate that this variable has been derived from other sources and the strong correlation between Na⁺ and Cl⁻ (0.882) may indicate that these variables have been derived from same source. CO₃ has poor correlation with other variables in which the carbonate (CO₃) alkalinity is absent in most of the stations throughout the study and it is detectable only nearly above pH 8.0. This is approved by the findings of [50].

Table (2)Spearman correlation matrix of groundwater quality parameters (n = 66)

Parameter	EC	pH	TDS	Ca	Mg	Na	K	Cl	CO ₃	HCO ₃	SO ₄	NO ₃
EC	1.000											
pH	0.174	1.000										
TDS	0.936	0.182	1.000									
Ca	0.796	0.296 ^a	0.808	1.000								
Mg	0.781	0.217	0.856	0.735	1.000							
Na	0.904	0.135	0.956	0.678	0.726	1.000						
K	0.903	0.164	0.970	0.808	0.824	0.927	1.000					
Cl	0.863	0.188	0.922	0.735	0.773	0.882	0.896	1.000				
CO ₃	0.224	0.483	0.198	0.294 ^a	0.263 ^a	0.123	0.206	0.136	1.000			
HCO ₃	0.743	0.184	0.790	0.662	0.715	0.749	0.782	0.645	0.287 ^a	1.000		
SO ₄	0.584	0.003	0.638	0.471	0.634	0.579	0.612	0.452	0.058	0.700	1.000	
NO ₃	0.196	-0.291 ^a	0.230	0.178	0.082	0.259 ^a	0.295 ^a	0.220	-0.432	0.088	0.167	1.00

^a Significant value at p<0.05

Factor analysis

Factor analysis (varimax rotation) was performed on the normalized data sets to compare the composition structure between analyzed groundwater samples and identify the factors influencing each one. Eigen values are normally used to determine the number of principal components that can be retained for further study. Eigen values of 1.0 or greater are considered significant [26]. The result of FA is given in Table 3. From the results, first three factors have Eigen values greater than or close to unity and explain 82.506% of the total variance in each groundwater quality data sets.

Table (3). Factor loading matrix and total variance explained after Varimax rotation

Parameters	Factor 1	Factor 2	Factor 3
EC	0.969	0.001	0.176
pH	-0.130	-0.078	-0.913
TDS	0.968	0.003	0.181
Ca	0.621	-0.009	0.297
Mg	0.803	0.224	0.439
Na	0.877	-0.140	-0.024
K	0.938	0.029	0.219
Cl	0.750	-0.121	0.259
CO ₃	0.893	0.063	-0.014
HCO ₃	0.844	0.375	-0.212
SO ₄	0.565	0.775	0.021
NO ₃	0.440	-0.743	-0.134
Eigen value	7.155	1.388	1.357
% Total variance	59.627	11.569	11.309
Cumulative % variance	59.627	71.196	82.506


Factor 1 (F1) explained 59.627% of the total variance which is positively contributed by EC, TDS, Ca²⁺, Mg²⁺, Na⁺, K⁺, Cl⁻, CO₃²⁻ and HCO₃⁻. The high loading factor of EC is likely due to the active participation of dissolved ions in the groundwater quality. This factor has contribution from sources which can be linked to both the geology as well as the anthropogenic sources. F1 is related to the hydro-geochemical variables originating from mineralization of the geological components of soils and the irrigation return flow. The level of significance of the correlation coefficient (*R* values) between variables (Ca²⁺, Mg²⁺, Na⁺, K⁺, Cl⁻ and HCO₃⁻) shows strong positive correlation with each other which confirmed their coherence and logical assemblage into respective factors. The second factor (F2) explained 11.569% of the total variance which is positively contributed by SO₄²⁻ and negatively by NO₃⁻. This factor represents the contribution of agricultural activities from agricultural areas and mixing of wastewater (cracks in pipes sewage networks). Farmers use ammonium sulfate fertilizers, and the Tigris river receives ammonium and sulphate via surface runoff and irrigation waters [51].

The F2, shows a negative correlation with NO₃, indicating that groundwater sulphate is derived from other sources. Previous studies indicated that source of non-agricultural nitrate in groundwater is due to discharge of wastewater, effluent from on-site sanitation, leachate from solid waste dump sites, and reuse of wastewater for irrigation [52,53]. In the study area, the seepage from wastewater network pipes is more pronounced due to cracks in pipes sewage networks [54]. The third factor (F3) explained 11.309% of the total variance which is negatively contributed by pH. This factor reflects the acidity-alkalinity scale in groundwater. Dissolution of cations and anions could also be regulated by this factor.

Cluster analysis


Classification of sampling site was performed by the use of cluster analysis (z-standardization of the input data, squared Euclidean distance as similarity measure and Ward's method of linkage), to detect the similarity between the monitoring sites and allowed grouping the 66 wells in three statistically significant clusters. The

results of cluster analysis CA are presented in a dendrogram (Fig. 4). Dendograms in cluster analysis provides a useful graphical tool determining the number of clusters which describes underlying process that leads to spatial variation [25]. The participation of wells in the formation of cluster seems to be not systematic (i.e., it is not the condition that wells of nearby locations are fall in the same cluster) (see Fig 5). This indicates that water quality of groundwater is varied considerably and such variation is due to the direct human influence on water quality such as surface contamination sources.

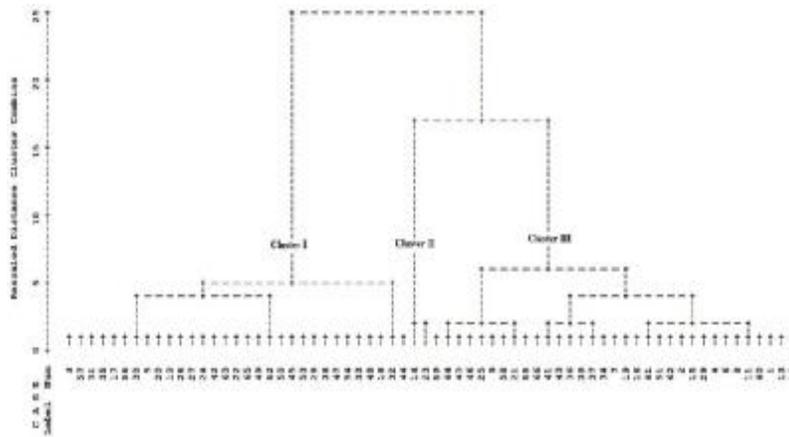

Figure(4). Dendrogram showing spatial clustering of monitoring sites

Broadly, three main clusters were classified (Fig 4 and 5) based on the similar water quality characteristics. The water quality of groundwater is obviously varied between the clusters (see Table 4). Cluster I corresponds to relatively less polluted sites and comprises the wells of less salinization. Cluster II corresponds to moderately pollution and comprises wells of high salinization. Cluster III were corresponded to highly polluted sites which agglomerates the wells of very high salinization (only two sites). The high values EC and TDS in Cluster III is mainly due to the anthropogenic deposit (see Fig. 2). The average values of EC in cluster I, cluster II and cluster III are 3163.2 $\mu\text{S/cm}$, 9612.4 $\mu\text{S/cm}$ and 29300 $\mu\text{S/cm}$ respectively. Salinity hazard is the most important water quality guideline on crop productivity as measured by EC. The primary effect of high EC water on crop productivity is the incapability of the plant to compete with ions in the soil solution for water. It is noticed that the average value of EC in the three clusters exceed the international standard specifications for drinking and irrigation purposes. In general, the quality of groundwater in the urban area of Baghdad as a whole is of high salinity and extensive studies are required to suggest options for best management of groundwater salinity in Baghdad.

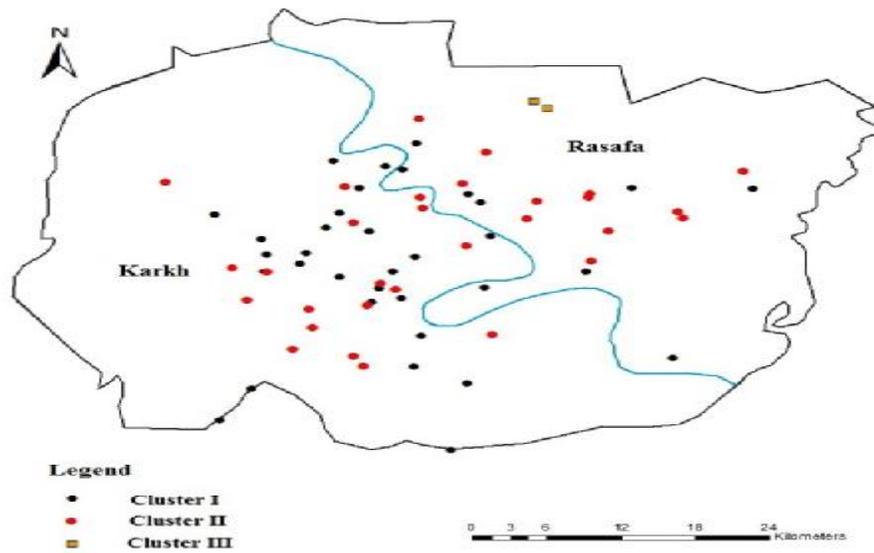

Figure(5). Classification of wells according to cluster analysis

Table (4). The average values of three identified clusters

Parameters	Cluster I	Cluster II	Cluster III
EC, $\mu\text{S}/\text{cm}$	3163.2	9612.4	29300
pH	7.68	7.89	8.02
TDS, mg/L	2055.5	6397.5	18845
Ca, mg/L	217.58	544.24	1100
Mg, mg/L	205.96	775.81	1899.5
Na, mg/L	582.80	1842.78	6324.5
K, mg/L	4.67	18.37	51.5
Cl, mg/L	464.09	2037.03	7953.5
CO ₃ , mg/L	1.29	11.93	35
HCO ₃ , mg/L	93.03	211.66	465
SO ₄ , mg/L	447.61	808.21	2436.5
NO ₃ , mg/L	2.47	2.38	0.45

CONCLUSION

Multivariate statistical techniques namely, factor and cluster analyses were applied in order to get better information about the groundwater quality of the urban area of Baghdad. Three latent factors were identified as responsible for the data structure, explaining 82.506% of total variance in the data set. The first factor explained 59.627% of the total variance and mainly related to mineralization and irrigation return flow. The second factor explained 11.569% which represents the agricultural activities from agricultural areas such as fertilization and mixing of wastewater whereas, the third factor explained 11.309% of the variances and reflects the acidity–alkalinity scale in groundwater. Three main groups were classified by cluster analysis, cluster I corresponds to relatively less polluted sites and comprises the wells

of less salinization. Cluster II were corresponded to highly polluted sites which agglomerates the wells of very high salinization. Cluster III corresponds to moderately pollution and comprises wells of high salinization. Based on Hill–Piper trilinear diagram, groundwater samples from wells were classified into two types Ca^{2+} - Mg^{2+} - Cl^- - SO_4^{2-} type (51.5% of the total samples) and Na^{2+} - K^+ - Cl^- - SO_4^{2-} type water (48.5% of the total samples). It could be concluded that groundwater quality of Baghdad, as a whole suffered from salinity. Relevant authorities must begin preparing the necessary plans for the management of groundwater salinity to improve the quality of water. Multivariate methods are believed to be valuable to help water resources managers understand complex nature of groundwater quality issues and determine the priorities to improve groundwater quality.

Acknowledgement The authors wish to thank the general commission for groundwater for conducting the analyses in their laboratories and supplying the groundwater data used in this study.

REFERENCE

- [1].Metcalf; Eddy: Urban water supply reforms in the Kathmandu valley (ADB TA Number 2998-NEP), Completion report, Volume I & II-Executive summary, main report & Annex 1 through 7. Metcalf and Eddy, Inc. with CEMAT Consultants Ltd., 18 Feb 2000.
- [2].Adhikary, P.P.; Chandrasekharan, H.; Chakraborty D.; Kumar B.; Yadav B.R.: Statistical approaches for hydrogeochemical characterization of groundwater in West Delhi, India. *Environ Monit Assess* 154, 41–52 (2009)
- [3].Vijay, R.; Khobragade, P.; Mohapatra, P.K.: Assessment of groundwater quality in Puri City, India: an impact of anthropogenic activities. *Environ Monit Assess* 177, 409–418 (2011)
- [4].Marghade, D.; Malpe, D.B.; Zade, D.B.: Major ion chemistry of shallow groundwater of a fast growing city of Central India. *Environ Monit Assess* 184, 2405–2418 (2012)
- [5].Umar, R.; Alam, F.: Assessment of hydrogeochemical characteristics of groundwater in parts of Hindon–Yamuna interfluvial region, Baghpat District, Western Uttar Pradesh. *Environ Monit Assess* 184, 2321–2336 (2012)
- [6].Handa, B.K.: Status report on groundwater pollution in India, In *Pollution of groundwater by potassium in India* (Vol. 1, pp. 1–301). Government of India: Central Groundwater Board (1992)
- [7].Tatawat, R.K.; Chandel, C.P.S.: A hydrochemical profile for assessing the groundwater quality of Jaipur City. *Environ Monit Assess*, 143, 337–343 (2008)
- [8].Kumar, S.K.; Rammohan, V.; Sahayam, J.D.; Jeevanandam, M.: Assessment of groundwater quality and hydrogeochemistry of Manimuktha River basin, Tamil Nadu, India. *Environ Monit Assess* 159, 341–351 (2009)
- [9].Adhikary, P.P.; Chandrasekharan, H.; Chakraborty, D.; Kamble, K.: Assessment of groundwater pollution in West Delhi, India using geostatistical approach. *Environ Monit Assess* 167, 599–615 (2010)
- [10].Dash, J.P.; Sarangi A.; Singh, D.K.: Spatial Variability of Groundwater Depth and Quality Parameters in the National Capital Territory of Delhi, *Environmental Management* 45, 640–650 (2010)

- [11].Nagarajan, R.; Rajmohan, N.; Mahendran, U.; Senthamilkumar, S.: Evaluation of groundwater quality and its suitability for drinking and agricultural use in Thanjavur city, Tamil Nadu, India. *Environ Monit Assess* 171, 289–308 (2010)
- [12].Dudeja, D.; Bartarya, S.K.; Biyani, A.K.: Hydrochemical and water quality assessment of groundwater in Doon Valley of Outer Himalaya, Uttarakhand, India. *Environ Monit Assess* 181, 183–204 (2011)
- [13].Ramesh, K.; Elango,L.: Groundwater quality and its suitability for domestic and agricultural use in Tondiar river basin, Tamil Nadu, India. *Environ Monit Assess* 184, 3887–3899 (2012)
- [14].Rasouli, F.; Pouya, A.K.; Cheraghi, S.A.M.: Hydrogeochemistry and water quality assessment of the Kor–Sivand Basin, Fars province, Iran. *Environ Monit Assess*, 184, 4861–4877 (2012)
- [15].Shanmugam, P.; Ambujam N.K.: A hydrochemical and geological investigation on the Mambakkam mini watershed, Kancheepuram District, Tamil Nadu. *Environ Monit Assess* 184, 3293–3306 (2012)
- [16].Zhang, B.; Song, X.; Zhang, Y.; Han, D.; Tang, C.; Yu, Y.; Ma,Y.: Hydrochemical characteristics and water quality assessment of surface water and groundwater in Songnen plain, Northeast China. *water research* 46, 2737-2748 (2012)
- [17].Ali, S.M.; Al-Tawash, B.S.; Al-Bassam, K.S.: Geochemical modeling and isotope analysis of the shallow groundwater aquifer of Baghdad area. *Arab J Geosci* (2014). doi:10.1007/s12517-013-0925-2.
- [18].Al-Shami, A.; Al-Ani, N.; Al-Shalchi, K.T.: Evaluation of environmental impact of Tigris river pollution (between Jadirriya and dora bridges). *Journal of Engineering* 3(13), 844-861 (2006)
- [19].Abdul Razzak, I.A.; Sulaymon, A.H.: Effects of Discharging Sewage of Baghdad to Tigris River on the Water Quality. *Eng. & Tech. Journal* 27(16), 2903-2914 (2009)
- [20].AL Suhaili, R.H.SH.; Nasser, N.O.A.: water quality indices for Tigris river in Baghdad city. *Journal of Engineering* 3(14), 6262-6222 (2008)
- [21].Mutlak, S.M.; Salih, B.M.; Tawfiq, S.J.: Quality of Tigris River passing through Baghdad for irrigation. *Water, Air, and Soil Pollution* 13, 9-16 (1980)
- [22].Al-Obaidi, A.H.: Evaluation of Tigris River Quality in Baghdad for the period between (November 2005- October2006). *Eng. & Tech. Journal* 27(9), 1736-1745 (2009)
- [23].Hussain, A.A.: Monthly variation of some physicochemical properties of Tigris river- Baghdad for the period between (2002-2003). *Eng. & Tech. Journal* 27(2):64-70 (2009) (in Arabic).
- [24].Alobaidy, A.M.J.; Maulood, B.K.; Kadhem, A.J.: Evaluating Raw and Treated Water Quality of Tigris River within Baghdad by Index Analysis. *J. Water Resource and Protection* 2, 629-635 (2010)
- [25].Boyacioglu, H.; Boyacioglu, H.: Surface Water Quality Assessment by Environmetric Methods. *Environ Monit Assess* 131,371–376 (2007)
- [26].Shrestha, S.; Kazama, F.: Assessment of surface water quality using multivariate statistical techniques: A case study of the Fuji river basin, Japan. *Environmental Modelling & Software* 22, 464–475 (2007)
- [27].Cieszynska, M.; Wesolowski, M.; Bartoszewicz, M.; Michalska, M.; Nowacki, J.: Application of physicochemical data for water-quality assessment of watercourses

- in the Gdansk Municipality (South Baltic coast). *Environ Monit Assess* 184, 2017–2029 (2012)
- [28].Wunderlin, D.A.; Díaz, M.P.; Amé, M.V.; Pesce, S.F.; Hued, A.C.; Bistoni, M.A.: Pattern recognition techniques for the evaluation of spatial and temporal variations in water quality. A case study: Suquía River Basin (Córdoba—Argentina). *Water Research* 35(12), 2881–2894 (2001)
- [29].Simeonov, V.; Simeonova, P.; Tsitouridou, R.: Chemometric quality assessment of surface water: Two case studies. *Chemical Engineering Ecology* 11(6), 449–469 (2004)
- [30].Singh, K.P.; Malik, A.; Mohan, D.; Sinha, S.: Multivariate statistical techniques for the evaluation of spatial and temporal variations in water quality of Gomti River (India): A case study. *Water Research* 38, 3980–3992 (2004)
- [31].Varol, M.; Sen, B.: Assessment of surface water quality using multivariate statistical techniques: a case study of Behrimaz Stream, Turkey. *Environ Monit Assess* 159, 543–553 (2009)
- [32].Palma, P.; Alvarenga, P.; Palma, V.L.; Fernandes, R.M.; Soares, A.M.V.M.; Barbosa, I.R.: Assessment of anthropogenic sources of water pollution using multivariate statistical techniques: a case study of the Alqueva’s reservoir, Portugal. *Environ Monit Assess* 165, 539–552 (2010)
- [33].Vieira, J.S.; Pires, J.C.M.; Martins, F.G.; Vilar, V.J.P.; Boaventura, R.A.R.; Botelho, C.M.S.: Surface Water Quality Assessment of Lis River Using Multivariate Statistical Methods. *Water Air Soil Pollut*, 223:5549–5561 (2012)
- [34].Al-Adili, A.S.: Geotechnical Evaluation of Baghdad Soil Subsidence and their Treatments. Ph.D. Thesis. University of Baghdad, Iraq (1998)
- [35].Iraqi Meteorological Agency (2010) Ministry of transport, department of climate/unpublished meteorological data tables, (1990–2010).
- [36].Buday, T.; Jassim, S.Z.: *The Regional Geology of Iraq, Vol. 2 Tectonism, Magmatism and Metamorphism*, 352p (1987)
- [37].Hamza, N.M.; Yacoub, S. Y.: *The geology of Baghdad- Falluja area*, GEOSURV, Int. report, No. 1382, SOM library, Baghdad, Iraq (1982)
- [38].Kowalkowski, T.; Zbytniewski, R.; Szpejna, J.; Buszewski, B.: Application chemometrics in river water classification. *Water Research* 40, 744–752 (2006)
- [39].Zhou, F.; Liu, Y.; Guo, H.: Application of Multivariate Statistical Methods to Water Quality Assessment of the Watercourses in Northwestern New Territories, Hong Kong. *Environ Monit Assess* 132, 1–13 (2007)
- [40].Vega, M.; Pardo, R.; Barrado, E.; Deban, L.: Assessment of seasonal and polluting effects on the quality of river water by exploratory data analysis. *Water Research* 32, 3581–3592 (1998)
- [41].Singh, K.P.; Malik, A.; Sinha, S.: Water quality assessment and apportionment of pollution sources of Gomti river (India) using multivariate statistical techniques—A case study. *Analytica Chimica Acta* 538, 355–374 (2005)
- [42].Gupta, A.K.; Gupta, S.K.; Patil, R.S.: Statistical analyses of coastal water quality for a port and harbor region in India. *Environ Monit Assess* 102, 179–200 (2005)
- [43].Altin A.; Filiz, Z.; Iscen, C.F.: Assessment of seasonal variations of surface water quality characteristics for Porsuk Stream. *Environ Monit Assess* 158, 51–65 (2009)
- [44].Zeng, X.; Rasmussen, T.C.: Multivariate statistical characterization of water quality in Lake Lanier, Georgia, USA. *Journal of Environmental Quality* 34, 1980–1991 (2005)

- [45].Singh, U.K.; Kumar, M.; Chauhan, R.; Jha, P.K.; AL. Ramanathan; Subramanian, V.: Assessment of the impact of landfill on groundwater quality: A case study of the Pirana site in western India. *Environ Monit Assess* 141:309–321 (2008)
- [46].Hill, R.A.: Geochemical patterns in Coachella Valley, California. *Am. Geoph. Union Trans* 21, 46-53 (1940)
- [47].Piper, A.M.: A graphical procedure in the geochemical interpretation of water analysis. *Transactions of the American Geophysical Union* 25, 914–928 (1944)
- [48].Piper, A.M.: A graphical procedure in the geochemical interpretation of water analysis. *USGS Groundwater Note NO. 12* (1953)
- [49].Winston, R.B.: Graphical user interface for MODFLOW, version 4. U.S. Geological Survey Open-File Report 00-315, 27 pp (2000)
- [50].Narain, S.; Chauhan, R.: Water quality status of river complex Yamuna at Panchnada dist. Etawah, U.P. (India) I: An Integrated management approach. *Poll. Res.* 19(3), 351– 364 (2000)
- [51].Ahmed, S.M.; Sadik, S.K.; Muslah, O.H.: Effect of Manures and Mulching on yield of potato (*Solanum tuberosum* L.) Desiree. *Al-Anbar Journal of Agricultural sciences* 2(7), 104-115 (2009)
- [52].Wakida, F.T.; Lerner, D.N.: Non-agricultural sources of groundwater nitrate: A review and case study. *Water Research* 39(1), 3–16 (2005)
- [53].Chanakya, H.N.; Sharatchandra, H.C.: Nitrogen pool, flows, impact and sustainability issues of human waste management in the city of Bangalore. *Current Science* 94(11), 1447–1454 (2008)
- [54].Abdul Razzak A.M.; Abdul Rassol N.M.: Influence of old sewer system of wastewater on the environmental condition (Alshorja markets as a model). *Iraqi Journal of Market Research and Consumer Protection* 2(3), 50-75 (2010) (in arabic)